

Electric instantaneous water heaters

EPME electronic LCD



IP25

A

Electronically controlled heater with LCD display at the best price.

Application



Most important advantages

LCD display

- the inlet and outlet temperature
- the water flow rate
- power with which the unit currently heats

Electronic control

- stability and smooth regulation water temperature
- the possibility to set temperature from 30°C to 60°C (1°C step)

Copper shielded heating elements

- reliable technology
- long life operation and resistance to water decay and air bubbles

The possibility to re-heat already pre-heated water


- inlet water temperature up to 60°C

Temperature lock

- allows the user to save the maximum temperature
- in order to protect children against burn injuries

Memory of three most commonly used temperatures

Dimensions

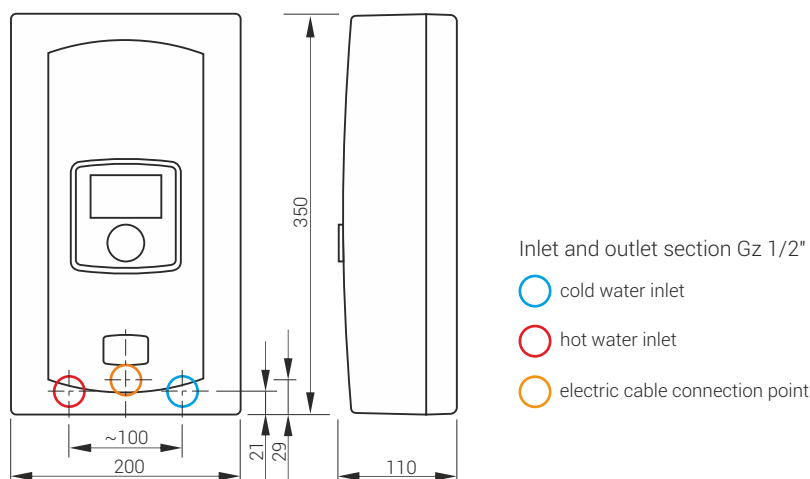

Technical data

| Type | Rated power / Rated voltage | Supply water pressure (MPa) | Rated current (A) | Min. connecting wires section (mm ²) | Efficiency ($\Delta t=30^\circ$) (l/min.) |
|---------------|-----------------------------|-----------------------------|-------------------|--|---|
| EPME-5,5-9,0* | 5,5-9,0 kW / 230V ~ | 0,1 - 0,6 | 24,0-39,3* | 3 x 2,5 - 3 x 6* | 2,7 - 4,3* |

* 8 powers in one heater. At the first start-up, the maximum power must be set. Parameters of the electrical installation must comply with the selected power.