


## Electric instantaneous water heaters

# PPE4.M electronic LCD

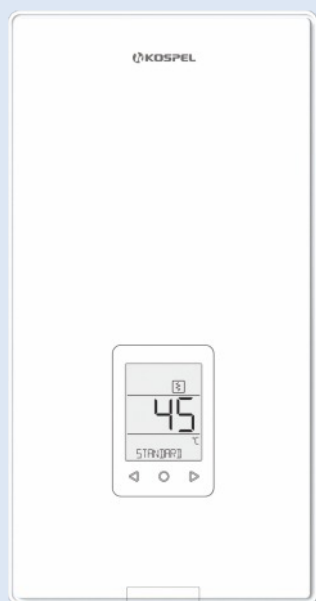

IP25

A

2 year\*  
warranty

## Applications



from 10kW



from 12kW



from 18kW

## Most important advantages

### Electronic control

- precise and comfortable temperature regulation of water in the range of 30-60°C with a precision of 1°C

### 4 power levels in one water heater

- option to select maximum power (except for 27 kW model)

### Remote access application

- control and monitoring of the water heater's operating parameters


### Possibility of reheating preheated water

- water temperature up to 60°C on the supply

### LCD display

- energy and water consumption statistics,
- display of inlet and outlet water temperature,
- display of flow rate,
- display of currently selected device power,
- maximum temperature limit setting for burn protection,
- memory for 3 most frequently used temperatures.

## Dimensions

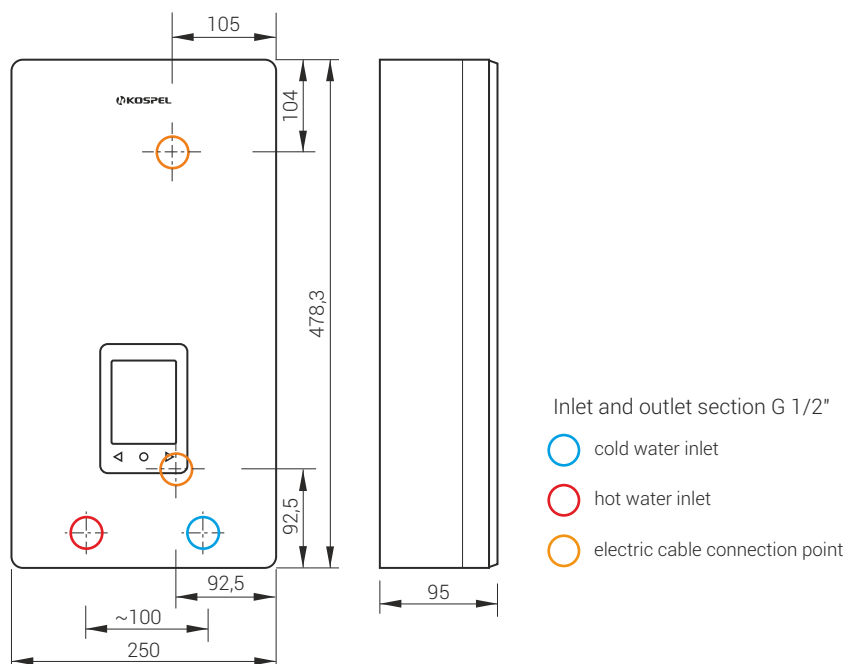

## Technical data

Type	Rated power / Rated voltage	Supply water pressure (MPa)	Rated current (A)	Min. connecting wires section (mm <sup>2</sup> )	Efficiency ( $\Delta t=30^{\circ}$ ) (l/min.)
PPE4.M-10/11/12/15	10/11/12/15 kW / 400V 3~	0,1 - 1,0	3x14,5/15,9/17,3/21,7	4 x 2,5	4,3/5,2/5,8/7,2
PPE4.M-17/18/21/24	17/18/21/24 kW / 400V 3~	0,1 - 1,0	3x24,6/26,0/30,3/34,6	4 x 6	8,1/8,7/10,1/11,6
PPE4.M-27	27 kW / 400V 3~	0,1 - 1,0	3x39	4 x 6	13,0