

CH buffer tanks, not enamelled

SV/SVW






B
200 liters

C
Other capacities

Ideal to store domestic hot water from different sources of heat, eg. 2 central heating boilers and solar collectors.

Dimensions

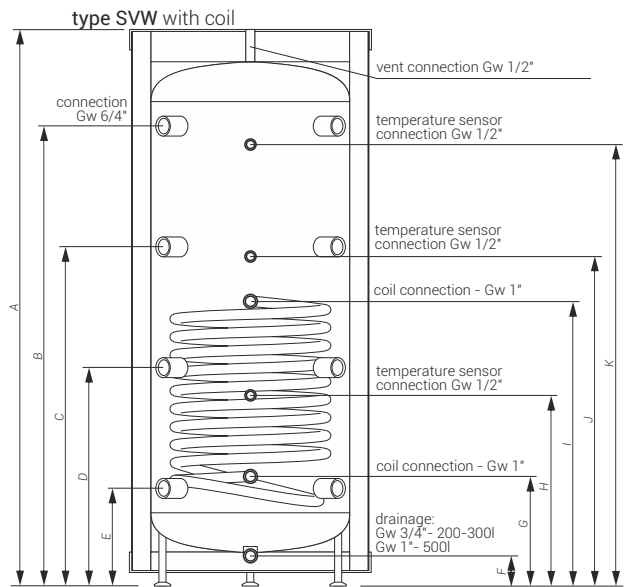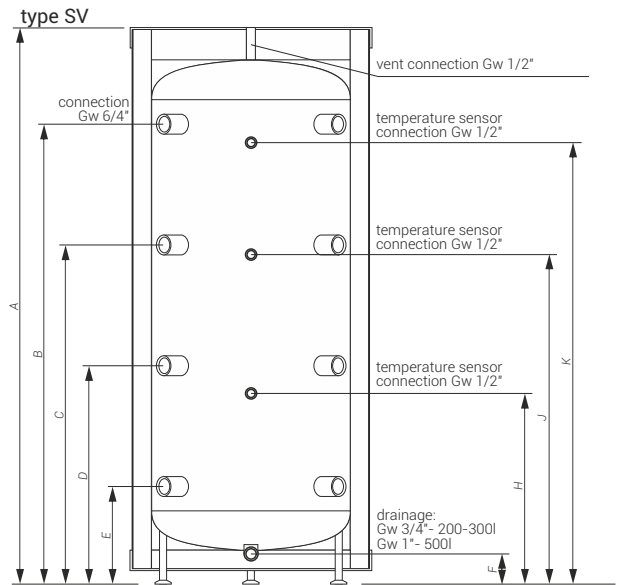

| | Diameter (mm) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | J (mm) | K (mm) |
|---------|---------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| SV-200 | 595 | 1616 | 1322 | 970 | 618 | 266 | 125 | - | 554 | - | 911 | 1239 |
| SV-300 | 692 | 1596 | 1338 | 973 | 611 | 249 | 126 | - | 544 | - | 940 | 1249 |
| SV-500 | 854 | 1761 | 1446 | 1051 | 656 | 261 | 130 | - | 629 | - | 1064 | 1379 |
| SVW-200 | 595 | 1616 | 1322 | 970 | 618 | 266 | 125 | 256 | 554 | 811 | 911 | 1239 |
| SVW-300 | 692 | 1596 | 1338 | 973 | 611 | 249 | 126 | 239 | 544 | 850 | 940 | 1249 |
| SVW-500 | 854 | 1761 | 1446 | 1051 | 656 | 261 | 130 | 251 | 629 | 974 | 1064 | 1379 |

Technical data

| Type | Capacity (l) | Surface area of coil (m ²) | Rated pressure (cylinder / coil) (MPa) | Thickness/insulation material*** (mm) | Stand- by losses** (W) |
|---------|--------------|--|--|---------------------------------------|------------------------|
| SV-200 | 210 | - | 0,6 / - | 65/PUR/NR | 59 |
| SV-300 | 307 | - | 0,6 / - | 67/EPS/R | 92 |
| SV-500 | 485 | - | 0,6 / - | 100/EPS/R | 83 |
| SVW-200 | 204 | 0,75 | 0,6 / 1,0 | 65/PUR/NR | 59 |
| SVW-300 | 300 | 1,5 | 0,6 / 1,0 | 67/EPS/R | 96 |
| SVW-500 | 465 | 2,25 | 0,6 / 1,0 | 100/EPS/R | 82 |

** In line with EU Commission resolution no. 812/2013, 814/2013.

*** Insulation: R-removable, NR- not removable.