

Vertical hot water cylinders

SWP



B

HEAT PUMP
READY

6 year*
warranty

Cylinders with a very big heating coil. Perfect for co-operation with the heat pump.

Additional equipment

Immersion heaters: GRW-1,4kW/230V;
GRW-2,0kW/230V; GRW-3,0kW/230V;
GRW-4,5kW/400V (SWP-200, SWP-300),
GRW-6,0kW/400V (SWP-300)

Technical data

| Type | Capacity (l) | Surface area of coil (m ²) | Rated pressure (cylinder / coil) (MPa) | Power of coil ** (kW) | Thickness / insulation material *** (mm) | Stand-by losses **** (W) | Anode type |
|---------|--------------|--|--|-----------------------|--|--------------------------|------------|
| SWP-200 | 199 | 2,1 | 0,6 / 1,0 | 60 / 18 | 65/PUR/NR | 59 | AMW.M8.400 |
| SWP-300 | 310 | 2,6 | 0,6 / 1,0 | 70 / 21 | 67/PUR/NR | 59 | AMW.M8.500 |

* Detailed warranty conditions are described in the warranty card.

** Following parameters 80/10/450C / 55/10/450C (heating water temp. / feed water temp. / DHW temp.), flow rate of heating water through the coil 2,5 m³/h.

*** Insulation: R - removable, NR - not removable.

**** In line with EU Commission resolution no. 812/2013, 814/2013.

Most important advantages

Large coil area

- heating coil with a large area
 - 2,1 m² - SWP-200
 - 2,6 m² - SWP-300
- heat pump compatible


Advanced production technology

- automation provides full repeatability of the process and high precision
- evenly applied layer of enamel with optimal thickness creates the highest quality protection

Unbeatable quality

- products are made of the steel grades selected by our verified suppliers
- each device (100%) undergoes leakage tests and coating checks quality control

Dimensions

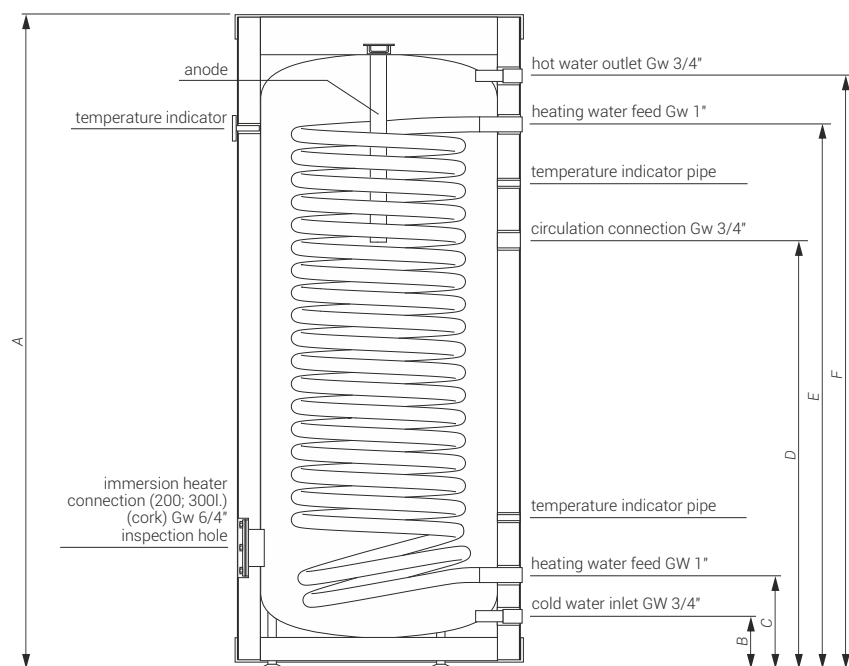

| | Diameter (mm) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|---------|---------------|--------|--------|--------|--------|--------|--------|
| SWP-200 | 595 | 1610 | 127 | 258 | 993 | 1290 | 1464 |
| SWP-300 | 695 | 1615 | 127 | 241 | 1071 | 1313 | 1464 |